




Short Link Chain - Commercial Quality

- Commercial grade steel material.
- Based upon DIN 766 Grade 3.
- Not to be used for lifting applications.
- Supplied in self colour, electro galvanized and hot dipped galvanized finish.
- Smaller and Larger diameters can be supplied upon request.


self colour	code	chain dia. (mm)	P (mm)	B (mm)	weight (kgs/mtr)	
	galvanised					
	J1311	J1301	6	18.5	20	0.80
	J1312	J1302	8	24	27	1.40
	J1313	J1303	10	28	34	2.20
	J1314	J1304	12	36	41	3.10
	J1315	J1305	16	45	54	5.70

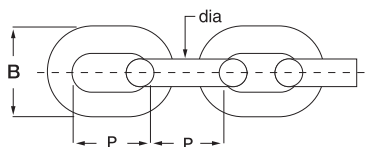

Short Link Chain - Mild Steel

- Material: Mild steel.
- Proof load is 2 times the W.L.L.
- Minimum breaking load is 4 times the W.L.L.
- Not to be used for lifting applications.
- Supplied in self colour or hot dipped galvanized finish.
- Smaller and larger diameters can be supplied up on request.

code	galvanised	chain dia. (mm)	P (mm)	B (mm)	W.L.L. (kgs)	weight (kgs/mtr)
self colour						
J0401	J0101	6	18.5	20	600	0.75
J0402	J0102	8	24	27	875	1.35
J0403	J0103	9.5	33	33	1400	1.85
J0404	J0104	12	36	40	2400	3.25
J0405	J0105	16	48	54	3625	6.10

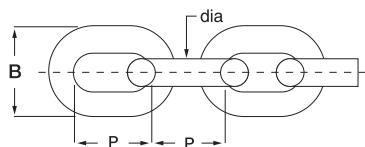

NEVER EXCEED MAXIMUM CAPACITY

Ensure operator follows safe use instruction guidelines



George Taylor & Company Lifting Gear (Midlands) Ltd. Brickyard Road, Aldridge, West Midlands WS9 8SR

Telephone: 01922 457916 or visit: www.gtlifting.co.uk

ALL OFFERS ARE SUBJECT TO OUR CONDITIONS OF BUSINESS