




GT Beam Clamp

The GT Beam Clamp is designed specifically to provide quick and versatile rigging or hoisting points for a huge variety of applications.

- Easy and simple mounting.
- Adjustable to fit a wide range of flange widths and beams.
- Heavy duty construction allows safe and secure grip in the beam.
- Special jaw design applies the load away from the flange edge, thus reducing flange stress.
- Individually tested and certified.

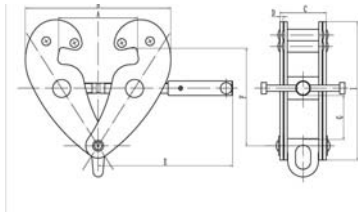


code	capacity (kgs)	adj. beam width (mm)	A max (mm)	B min (mm)	B max (mm)	C (mm)	D (mm)	E (mm)	F min (mm)	F max (mm)	G min (mm)	weight each (kgs)
T1101	1000	75-220	295	185	400	80	4	225	90	165	25	3.8
T1102	2000	75-220	295	185	400	85	6	225	90	165	25	5
T1103	3000	80-320	365	240	520	117	8	258	135	225	45	9
T1104	5000	80-320	365	240	520	125	10	258	135	225	45	11
T1105	10000	90-320	365	255	520	158	12	280	160	230	50	16



GT Heavy Duty Snatch Block

- Shackle and hook head fittings.
- Hooks are supplied with heavy duty safety catches.
- 3" and 4.5" blocks are fitted with bronze bush. All other sizes are fitted with roller bearings.
- Light and Robust design.
- Suitable for all types of industrial and commercial lifting and lowering applications.



sheave dia (inches)	head load metric tonnes	wire dia. (mm)	weight each (kgs)	A1 min (mm)	A2 max (mm)	B (mm)	C (mm)	shackle head code	hook head code
3	2	7-9	4	286	292	82	70	F0351	F0451
4½	4	10-12	6	345	358	120	70	F0352	F0452
6	8	20-22	15	475	498	160	93	F0353	F0453
6	8	16	14	475	498	160	93	F0355	F0455
8	8	20-22	20	528	549	210	93	F0354	F0454
10	12	20-22	36	679	695	260	114	F0356	F0456
8	15	20-22	34	620	641	210	98	F0357	F0457
12	15	24-26	54	767	797	310	133	F0358	F0458

NEVER EXCEED MAXIMUM CAPACITY

Ensure operator follows safe use instruction guidelines



George Taylor & Company Lifting Gear (Midlands) Ltd. Brickyard Road, Aldridge, West Midlands WS9 8SR

Telephone: 01922 457916 or visit: www.gtlifting.co.uk

ALL OFFERS ARE SUBJECT TO OUR CONDITIONS OF BUSINESS