


KRATOS - DOOR ANCHOR INSTRUCTIONS



For your safety, comply strictly with the instructions for use, verification, maintenance and storage. George Taylor & Co. cannot be held liable for any direct or indirect accident occurring as a result of use other than provided for in this notice; do not use this equipment beyond its capabilities!

LABELLING

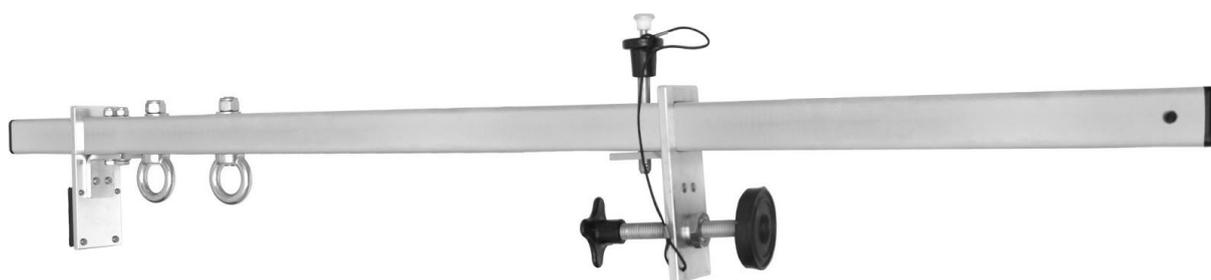

1. Manufacturers name
2. The product reference
3. The batch number
4. The date (month/year) of manufacture
5. Indication of conformity with the directive
6. Number of the certifying organisation responsible for inspecting the equipment
7. The number of the standard to which the product conforms
8. Read the instructions before use
9. The individual number
10. Maximum load capacity

WARNING

For two user ensure that opening does not exceed 800 mm.

For two users, ensure that opening does not exceed 800mm.




Ensure that the lever is closed during use

Ensure that the lever is closed during use.

USE AND PRECAUTIONS

The door anchor is a temporary and transportable anchorage point, which complies with the European Directive 89/686 CEE. It has been designed to be installed on door or window frames from 60 to 125 cm. The window or door frame should have a minimum breaking strength able to support static loads applied in the direction of use of at least 12 kN for one user and 13 kN for two users.

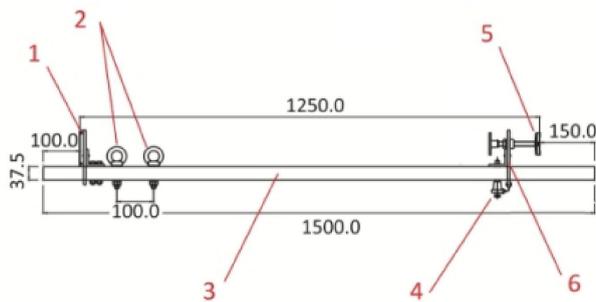

1	Fastening plate
2	D-ring / anchor point (x2)
3	Support bar with adjusting system
4	Safety pin
5	Adjusting screw
6	Adjusting plate

INSTALLATION

Install the anchor bar on the other side of the frame where the user shall work (figure 1). Unscrew as much as possible the adjusting screw from the adjusting plate, remove the safety pin and bring the adjusting plate back to the 2 D-rings. Install the fastening plate on one side of the frame support. Bring the adjusting plate as close as possible to the other side of the frame support, and put the safety pin in the adjusting plate and in the closest hole of the support bar.

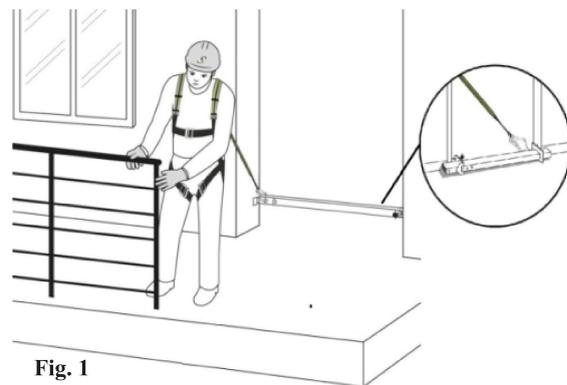


Fig. 1

Tighten the adjusting screw in order to make sure that the system is properly fixed. Secure the tightening by blocking the security lever.

Check the stability of the system by exerting a push in the direction in which the strength shall be applied. It is recommended that the installation of this anchor point be supervised by a qualified person. In all cases, connections between the attachment D-Rings and the fall arrest system should be made through connectors (EN362). During the use, please check regularly that the connector is correctly closed.

Thus installed, the anchor point can be used according to the 2 following setups: On window frame (façade), use in « vertical » setup: combined with a fall arrest EN360, EN355 or EN353 in order to catch the user in case of a fall.

On doorframe (indoors), use in « horizontal » setup: combined with a work restraint system EN358 in order to prevent the user from accessing to an area where there is a risk of falling.

Make sure that the work is done in such a way as to limit the pendulum effect, as well as the risk and the height of a fall. For safety reasons and before each use, make sure that in the event of a fall there is no obstacle obstructing the normal deployment of the fall arrest system fixed on this anchor point. User safety relies on the effectiveness of the equipment and full understanding of the safety instructions contained in this leaflet. Product marking should be checked periodically for legibility.

Before and during use, we recommend that you take every precaution necessary for an eventual safe rescue. This equipment is for the use of people trained, skilled and in good health, or under the supervision of a trained and skilled person. **Warning!** Certain medical conditions may affect user safety; if in doubt, consult your doctor. Before each use, verify the condition of the device by checking the proper working of the adjustment plate, the safety pin and the adjusting screw, check that the door anchor has no traces of cracks, deformation, or oxidation. Pay a particular attention to the two attachment D-Rings. Ensure the presence of the various pads and anti-slide discs. In case of doubt, the product should not be used anymore without a full checking by a qualified person.

Do not remove, add or replace any component of the product.

Chemical products: put the system out of use if it comes into contact with chemical products, solvents or fuels which could affect its workings.

TECHNICAL DATA

Material: Aluminium.

Weight: 4.75 kg.

KRATOS SAFETY certifies that the door anchor has been tested in accordance with the standard EN 795 Type B.

SUITABILITY FOR USE

A fall arrest harness (EN361) is the only body gripping device that may be used. It may be dangerous to create one's own fall arrest system where each safety function can interfere with another safety function. Therefore, it is important to read the recommendations on using each component in the system before use.

VERIFICATION

Service life of the product is 10 years (in accordance with the annual examination by a competent person authorized by Kratos Safety), but it may be increased or reduced according to use and/or the results of the annual inspections. The equipment should be inspected if there is any doubt, or following a fall and at least annually, by the manufacturer or a competent person authorised by the manufacturer to check its strength and hence the user's safety. The product data sheet should be completed after each annual product verification.

SERVICING AND STORAGE

(Comply strictly with these instructions)

During transport, keep the product in its packaging, well away from any cutting surface; clean it with water, wipe it with a rag and hang it up in a well-ventilated location, to let it dry naturally and away from a naked flame or heat source; follow the same procedure for components that have become damp during use. The system must be stored in its packaging in a dry, well aired place protected from extremes of temperature.