


KRATOS - WALLUTION PARAPET ANCHOR INSTRUCTIONS



For your safety, comply strictly with the instructions for use, verification, maintenance and storage. George Taylor & Co. cannot be held liable for any direct or indirect accident occurring as a result of use other than provided for in this notice; do not use this equipment beyond its capabilities!



LABELLING

1. Name of product
2. Load capacity (kg)
3. Direction of use
4. Date of manufacture
5. Product reference
6. Minimum resistance of the product (kN)
7. Individual number
8. The standard the product conforms to
9. Number of the certifying organisation responsible for inspecting the equipment
10. Indication of conformity with the directive
11. Manufacturer's name
12. Read the instructions before use

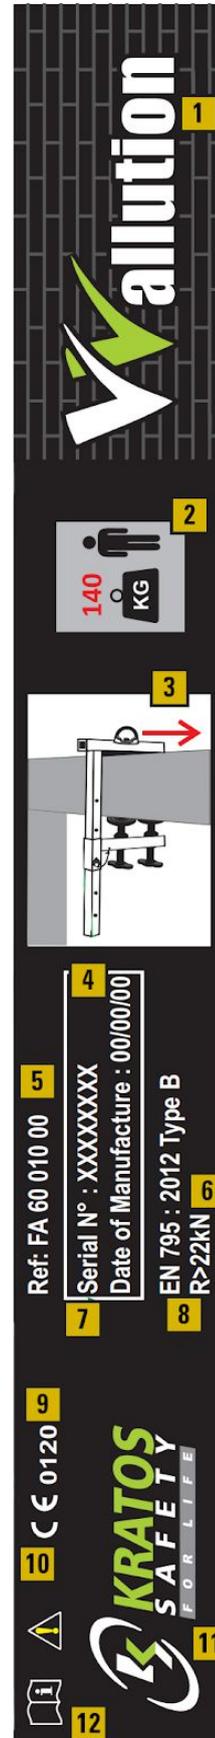

USE & PRECAUTIONS

The parapet anchor is a temporary and transportable anchorage point. It is aimed to be used in places where a low wall is a proper anchoring structure. It has to be installed on a wall whose minimum thickness is 6 cm and maximum is 36 cm. Walls must have a resistance which can be able to support static loads applied in the direction of use of 22kN for a user.

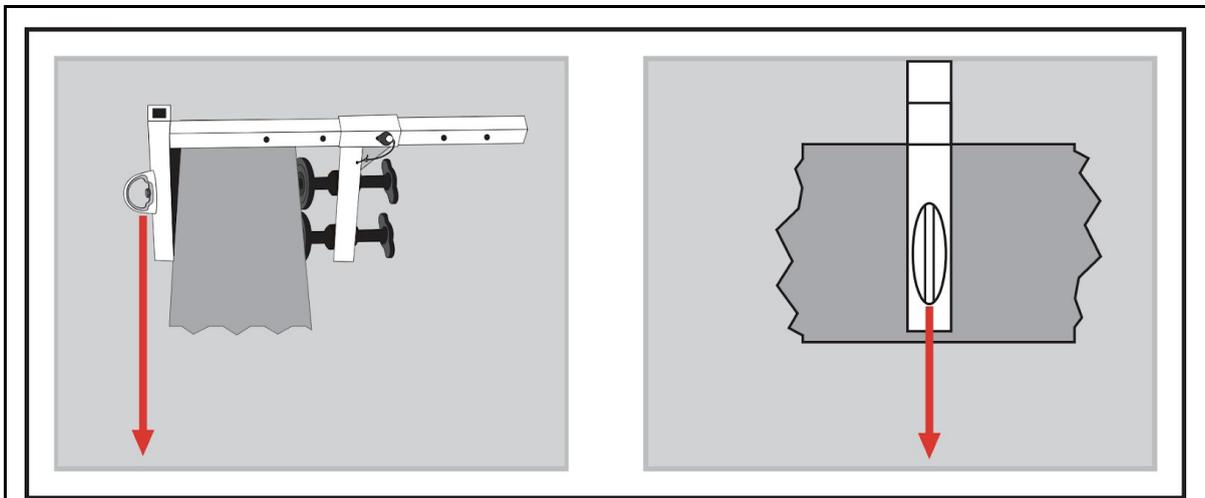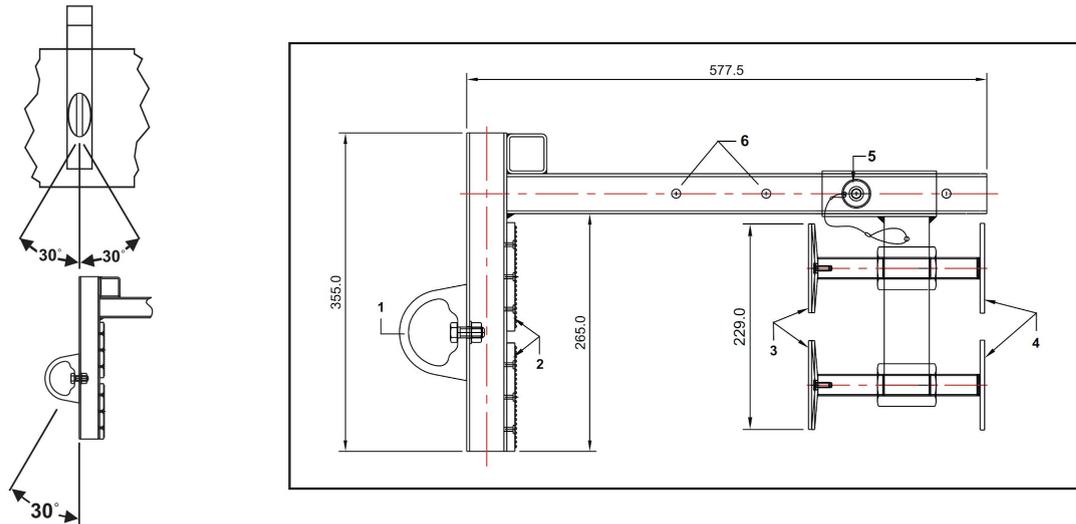

1	Attachment D-ring
2	Non-slip pad
3	Non-slip disc
4	Clamping screw
5	Locking pin
6	System for adjusting the thickness of the wall

INSTALLATION

1. Unscrew at maximum the 2 clamping screws and withdraw the locking pin. Install the parapet anchorage point on the wall, slide the clamping screws into the wall and introduce the locking pin in the available hole closest to the wall.
2. Tighten the 2 clamping screws on the wall, the pressure should be firm but not excessive, a hand tightening is sufficient.
3. Check the stability of the whole and make a pressure in the direction in which the strength will be applied during the use to check that the system is properly fixed.
4. It is recommended that the installation of this anchor point be supervised by a qualified person.
5. In all cases, connections between the wire rope and the harness attachment point will have to be made through a connector (EN362).
6. During the use, please check regularly that the connector is correctly closed.
7. Make sure that the work is done in such a way as to limit the pendulum effect, as well as the risk and the height of a fall. For safety reasons and before each use, make sure that in the event of a fall there is no obstacle obstructing the normal deployment of the fall arrest system fixed on this anchor point.
8. User safety relies on the effectiveness of the equipment and full understanding of the safety instructions contained in this leaflet.

Product markings should be checked periodically for legibility.

Before and during use we advise you to make the necessary arrangements for a safe rescue if the need should arise.

This equipment is for the use of people trained, skilled and in good health, or under the supervision of a trained and skilled person. Warning! Certain medical conditions may affect user safety; if in doubt, consult your doctor.

Before each use, make sure that the parapet anchorage point has no traces of cracks, deformation, or oxidation. Pay a particular attention to the attachment DRing. Check the good working of the clamping screws; please ensure you that the different non-slip pads and discs are present. To finish, please check that the locking pin is fully inserted into the tube. In case of deformation or doubt, the product must not be used any more.

Do not remove, add or replace any component of the product.

CHEMICAL PRODUCTS

Put the system out of use if it comes into contact with chemical products, solvents or fuels which could affect its workings.

TECHNICAL DATA

Steel treated against corrosion. Weight: 9.6 kg.

Kratos Safety certifies that the WALLUTION has been tested in accordance with the standard EN 795 Type B.

SUITABILITY FOR USE

A fall arrest harness (EN361) is the only body gripping device that may be used. It may be dangerous to create one's own fall arrest system where each safety function can interfere with another safety function. Therefore, it is important to read the recommendations on using each component in the system before use.

VERIFICATION

The recommended service life of the equipment is 10 years (in accordance with the annual examination by a competent person authorized by Kratos Safety), but it may be increased or reduced according to use and/or the results of the annual inspections. The equipment should be inspected if there is any doubt, or following a fall and at least annually, by the manufacturer or a competent person authorised by the manufacturer to check its strength and hence the user's safety.

The product data sheet should be completed after each annual product verification.

SERVICING & STORAGE

(strictly comply with these instructions)

During transport, keep the product in its packaging, well away from any cutting surface; clean it with water, wipe it with a rag and hang it up in a well-ventilated location, to let it dry naturally and away from a naked flame or heat source; follow the same procedure for components that have become damp during use. The system must be stored in its packaging in a dry, well aired place protected from extremes of temperature.