


Spec Sheet

Cobra Plus Grade 10 In-Line Grab Hook

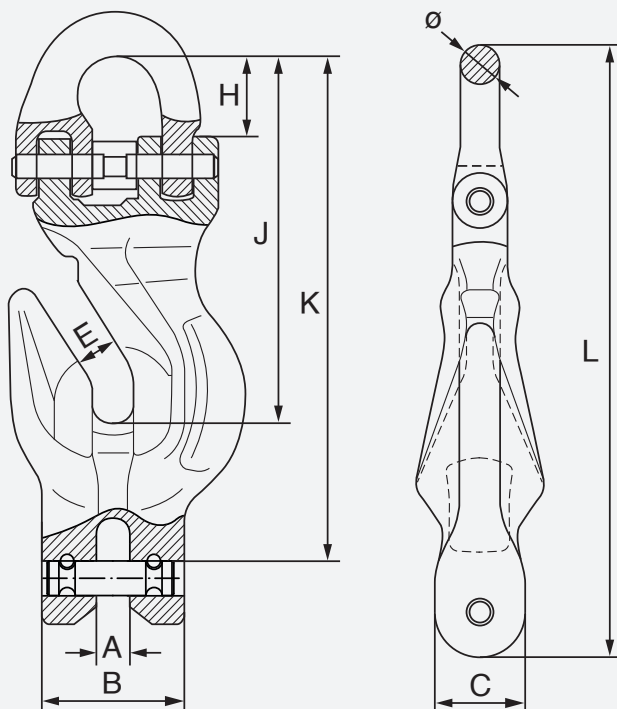

Material	Grade 10 alloy steel, quenched and tempered
Finish	Blue painted
Standard	Meets W.L.L. perf. req. of BS EN 1677-1 +25% of loads
Temp. Range	-20°C up to +200°C
Safety Factor	MBL equals 4 x W.L.L.
Markings	COBRA+ , material grade, size, product ID mark and traceability code
Certification	2.1 DoC

Product Code	Chain Dia mm	A mm	B mm	C mm	E mm	H mm	L mm	K mm	J mm	Ø mm
G100IGH6	6	8	32	18	8.3	16	128.7	80	104.7	7
G100IGH8	8	9.5	37	24	10.5	25	165	136	100	10
G100IGH10	10	12.5	48	29.5	13	28	203	167	123	12.6
G100IGH13	13	16	59	37	15.5	37	269	223	163	16.5
G100IGH16	16	18.5	70	46	18.5	40	328	271	194	20
G100IGH20	20	24	85	52	25	46	398	328	247	25
G100IGH22	22	25	100	61	26.5	51.5	430	354	258	27

Chain Dia mm	W.L.L. t	M.P.L. t	M.B.L. t	Weight kgs
6	1.4	3.5	5.6	0.36
8	2.5	6.25	10	0.79
10	4	10	16	1.5
13	6.7	16.75	26.8	3.4
16	10	25	40	5.7
20	16	40	64	9.8
22	19	47.5	76	14.6



1080 Series



Cobra Plus Grade 10 In-Line Grab Hook

The Cobra Plus In-Line grab hook is a 2 in 1 grade 10 clevis type connecting link meeting the performance requirements of BS EN 1677-1 +25% of loadings.

The In-Line grab hook is both a component connector and shortening device built in, allowing a straight connection from the master link to the chain even when used to shorten.

Designed to connect to grade 10 master links.