

www.gtlifting.co.uk
www.gtlifting.ae

Heavy Duty Lever Hoist



- Capacity ranging from 500kg - 9,000kg
- Heavy Duty Robust Casing
- Easy to use free wheel mechanism, enables chain to be pulled freely when not under load
- Grade 80 Calibrated Load Chain
- Swivel Hooks fitted with Heavy Duty Catches
- New improved Chain Stopper with Easy Grip


George Taylor & Company Lifting Gear (Midlands) Ltd Units 13/14, Brickyard Road, Aldridge, West Midlands WS9 8SR UK

T +44 (0)1922 457916 **F** +44 (0)1922 743664 **E** office@gtlifting.co.uk

Middle East George Taylor & Co (ME) FZC R.A.K. Free Trade Zone, PO BOX 50019, Ras Al Khaimah, United Arab Emirates

T +971 (0)7 2660041 **F** +971 (0)7 2660212 **E** gtliftng@emirates.net.ae

Heavy Duty
Lever Hoist
Technical
Data

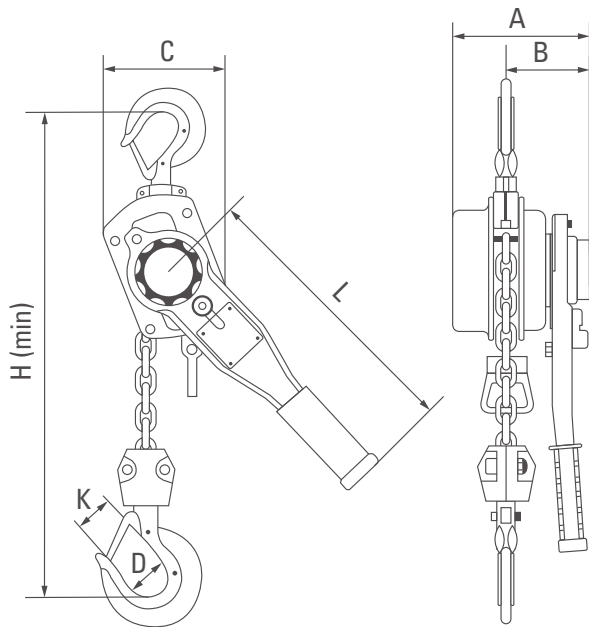

Dimensions

Code	Capacity (kgs)	Standard Lift (mtrs)	A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	L (mm)	K (mm)	Load Chain (mm)	Falls of Chain
T0200	500	1.5	105	78	80	35	260	300	25	5	1
T0201	750	1.5	148	90	136	40	320	280	27	6	1
T0207	1000	1.5	148	90	136	40	320	280	27	6	1
T0202	1500	1.5	172	98	160	44	380	410	34	7.1	1
T0206	2000	1.5	180	105	160	46	380	410	36	8	1
T0203	3000	1.5	200	115	180	50	480	410	38	10	1
T0204	6000	1.5	200	115	235	64	600	410	48	10	2
T0205	9000	1.5	200	115	330	85	700	410	57	10	3

Technical Data

Capacity (kgs)	Running Test Load (kN)	Effort Req'd to Lift Rated Load (kN)	Weight (kgs)	Extra Weight Per Mtr Lift (kgs)
500	7.5	340	4	0.52
750	11	140	7	0.8
1000	15	140	7	0.8
1500	22.5	220	10	1.1
2000	30	240	11.8	1.4
3000	37.5	320	17.5	2.2
6000	75	340	28.5	4.4
9000	112.5	360	45	6.6