


Spec Sheet

Cobra Plus Grade 10 Clevis Jaw Shackle

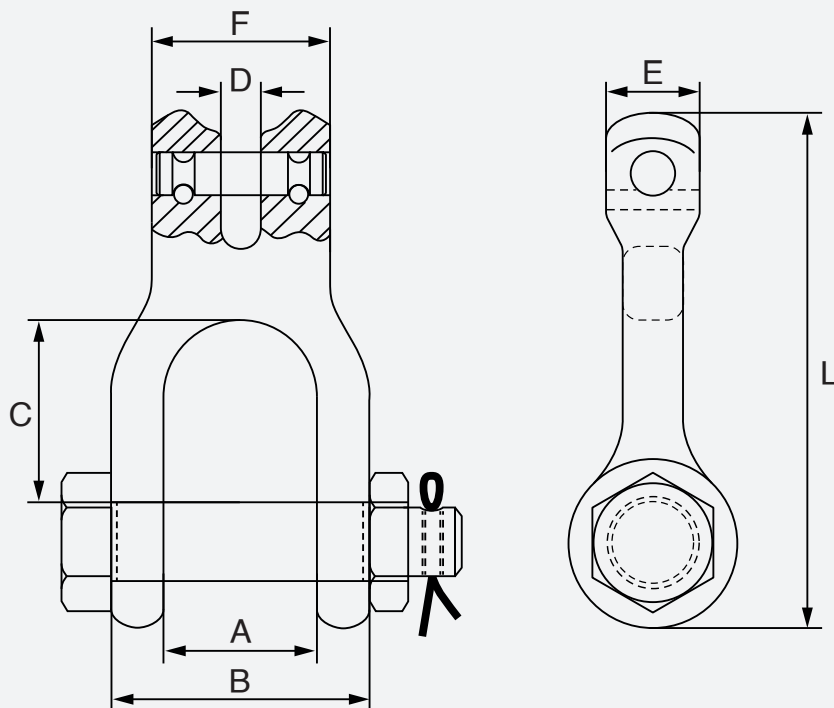

Material	Grade 10 alloy steel, quenched and tempered
Finish	Blue painted
Standard	Meets W.L.L. perf. req. of BS EN 1677-1 +25% of loads
Temp. Range	-20°C up to +200°C
Safety Factor	MBL equals 4 x W.L.L.
Markings	COBRA+ , material grade, size, product ID mark and traceability code
Certification	2.1 DoC

Product Code	Chain Dia mm	A mm	B mm	C mm	D mm	E mm	F mm	L mm
G100CJS8	8	31	51	36.3	9	20	36	103.5
G100CJS10	10	34	62	48	12.5	25	46.5	130.7
G100CJS13	13	49	83	64	15	31	59	160
G100CJS16	16	58	95	69.5	19	40	70	190.5

Chain Dia mm	W.L.L. t	M.P.L. t	M.B.L. t	Weight kgs
7/8	2.5	6.25	10	0.48
10	4	10	16	0.89
13	6.7	16.75	26.8	1.51
16	10	25	40	2.62



1033 Series



Cobra Plus Grade 10 Clevis Jaw Shackle

The Cobra Plus clevis jaw shackle is a grade 10 clevis type link meeting the performance requirements of BS EN 1677-1 +25% of loadings.

Complete with a safety bolt, nut and cotter pin, the clevis jaw shackle provides a fixed and secure attachment.

Clevis design enables direct connection to grade 10 chain.